

# Arkal 1½" Super Filter

# Catalog No. 1152 0\_\_\_

#### **Features**

- A "T" shaped filter with two 1½" male threads.
- A "T" volume filter for in-line installation on 1½" pipelines.
- The filter prevents clogging due to its enlarged filtering area that collects sediments and particles.
- Manufactured entirely from fiber reinforced plastic.
- A cylindrical column of grooved discs constitutes the filter element.
- A sealing spring keeps the discs compressed.
- Screw-on filter cover.
- Filter discs are available in various filtration grades.

#### **Technical Data**


	1½" BSPT (male)	1½" NPT (male)
Inlet/outlet diameter	40 mm – nominal diameter	
	48.2 mm – pipe diameter (O. D.)	
Maximum pressure	10 atm	145 psi
Maximum flow rate	12 m <sup>3</sup> /h (2.22 l/sec)	52.8 gpm
General filtration area	500 cm <sup>2</sup>	77.5 in <sup>2</sup>
Filtration volume	600 cm <sup>3</sup>	37 in <sup>3</sup>
Filter length L	350 mm	13 25/32"
Filter width W	130 mm	5 3/32"
Distance between end connections A	200 mm	7 7/8"
Weight	1.51 kg	3.32 lbs.
Maximum temperature	70° C	158° F
pH	5-11	5-11

## **Filtration Grades**


Blue (400 micron / 40 mesh)
Yellow (200 micron / 80 mesh)
Red (130 micron / 120 mesh)
Black (100 micron / 140 mesh)

Green (55 micron)

## **Head Loss Chart**

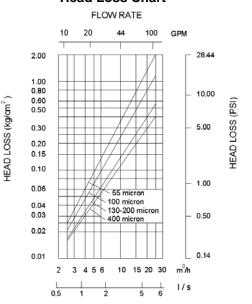







#### Installation

- 1. Filter may be installed either vertically or horizontally.
- 2. Use Teflon tape on filter end connections.
- 3. Never use spanners for tightening the filter cover.

#### **Maintenance**

If the filter discs are covered with lime deposits then remove the element and treat with chloric acid.

#### Dismantling

- 1. Turn off the water.
- 2. Make sure that the pressure is released from the filter.
- 3. Unscrew the cover from the filter body.
- 4. Pull out the filter element.
- 5. Move the sealing ring to the end of the spine.
- 6. Flush the discs with the water jet.

#### **Assembly**

- 1. Verify that the tightening spring is placed at the bottom of the filter cover.
- Assemble in reverse order.
- 3. Tighten the cover by turning the fixing nut clockwise and don't over tighten.

# Part List – 1½" Super Filter, Catalog No. 1152 0 \_ \_ \_

No.	Cat. No.	Description	Materials
1	2511 0103	GAUGE PORT NUT	RPP
2	5006 0004	GAUGE PORT SEAL	EPDM
3	2507 0100	FILTER ADAPTOR RING	RPA
4	2507 0102	STOP RING FOR ELEMENT	PBT
5	2012 1	DISC SET	PP
6	2502 0111	SPINE	RPA
7	5002 9004	90x4 O-RING	NR
8	5044 0011	FILTER SPRING	SS
9	2501 0111	FILTER COVER	RPA
10	5054 0008	1/4" TAP (*)	BRASS
11	2506 0100	FIXING NUT	RPA
12	2112 1	FILTER ELEMENT	
13	2530 0115	1" FILTER WRENCH	RPA
14	2208 0003	FILTER BODY COMPLEX BSP	
	2208 0004	FILTER BODY COMPLEX NPT	

(\*) - OPTIONAL

# Materials

R.P.P. – REINFORCED POLYPROPYLENE

R.P.A. – REINFORCED POLYAMIDE

S.S. - STAINLESS STEEL


P.P. - POLYPROPYLENE

N.R. - NITRILE RUBBER


P.C. - POLYCARBONAT


#### STANDARD CONFIGURATION

#### TOP VIEW



#### FRONT VIEW

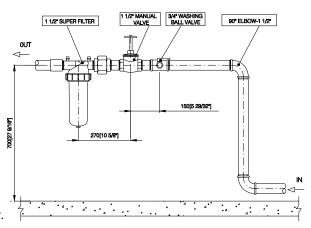

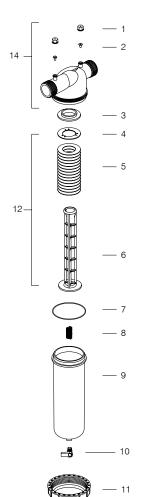



AK 1 1/2"SUPER 9605 71152EN 11/07